
TG96 Trough Guard

A lockable trough guard for a selected new trough or a measured retrofit installation.

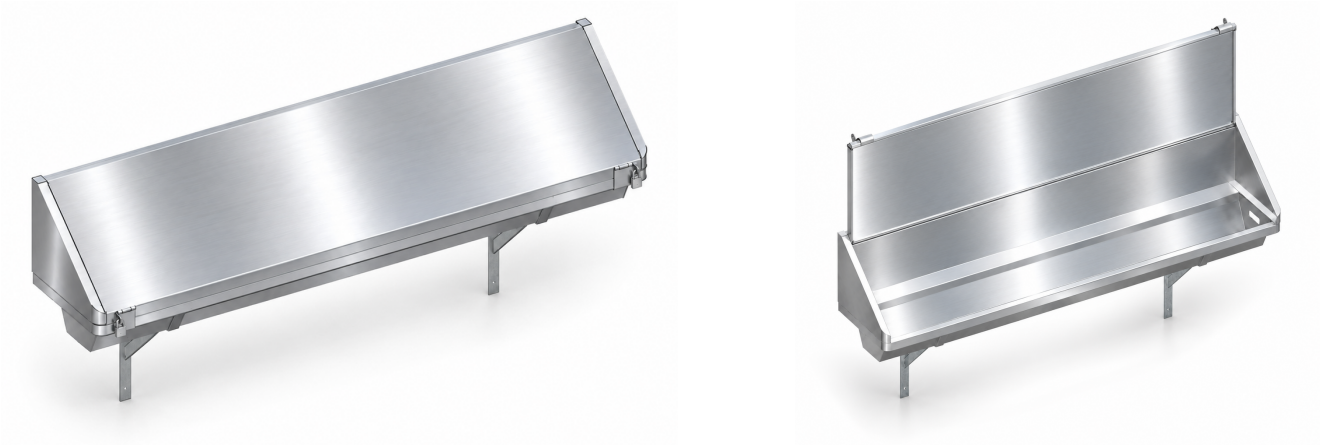

Closed guard (left) and open guard (right). Representative assembly; supplied components and fit require confirmation. NOT TO SCALE.

Product details

Item	Selection information
Typical application	Usually supplied pre-fitted to B619 or D619 troughs.
Separate supply	Available separately to retrofit an existing trough, subject to measurements and compatibility confirmation.
Guard construction	Original guard specification: nominal 1.2 mm 304 stainless steel, No. 4 finish. Confirm the selected assembly; support bracing may be galvanised steel.
Length and fit	State required trough length and actual rim / rear-edge profile. Confirm guard dimensions for the selected trough.
Clearance	Check the full opening envelope, wall clearance and every bubbler or bottle filler in both open and closed positions.
Included components	Confirm lid, end panels, hinges, locking hardware, support interfaces and installation scope with the quotation.

Standard or custom troughs: Marko fabricates troughs in our workshop. Request a TG96 fit review for your standard or made-to-order trough; any guard adjustment remains subject to quotation and project-drawing confirmation.

For a retrofit quote: Provide the trough model if known, measured length and width, rear-edge detail, tapware positions and clear photographs of the existing trough and fixings.

Before ordering: Confirm compatibility and the approved project drawing. The guard is not a universal fit; no load, security or accessibility rating is stated by this sheet.

ASSDA ACCREDITED

AJ's Stainless Pty Ltd trading as Marko Stainless & Aluminium
(02) 4956 8968 | sales@markostainless.com.au
www.markostainless.com.au